


**One Minute  
EZ Connect**



Slide off cover, Raise orange IDC Connectors and Insert wires.

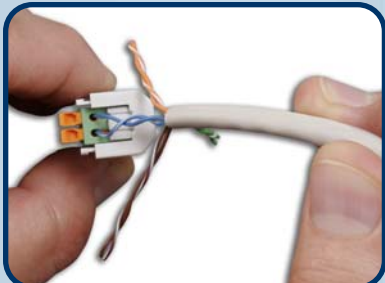

Press/Click down IDC connectors



Reinstall Cover-Slide Closed



Installation Complete

Ready to use in 1 minute or less

**EZ-VU Ultra-Flex Video Balun**



**Model BL3365  
Features**

- Flexible Mini-Coax Facilitates Installation in Domes and Camera Enclosures
- Transmits Video Up to 2000 Feet\*
- Surge Protected
- No Power Required
- Limited Lifetime Warranty
- No Tools Required / Installs in Seconds
- Compact Dimensions
- UL Listed for the U.S. and Canada

The BL3365 video balun allows the replacement of coaxial cable with unshielded twisted pair (UTP) cable to transmit baseband video 2000 feet and more\*, with no additional power source.

It supports NTSC, PAL and SECAM formats and is ideal for use with CCTV equipment such as CCTV cameras, monitors, quads, switchers, multiplexers, VCRs and DVRs.

Easy to use, the BL3365 video balun requires **NO TOOLS** and can be connected to UTP cable in seconds. Due to its exceptional interference rejection, the video signal can share the same cable bundle as data, audio and other video signals. Supports up-the-coax control signals up to 1000 feet.


Applications exist in the following areas:

- Commercial and Industrial Security
- Government, Military and Law Enforcement Applications
- Intelligent Transportation Systems (ITS)
- Casino Security and Surveillance Systems
- Airport Security Systems


\* See installation guide for more information – Distance may vary depending on cable quality

For more information, please contact:

*info@videobaluns.com*  
Tel: (508) 620-1002

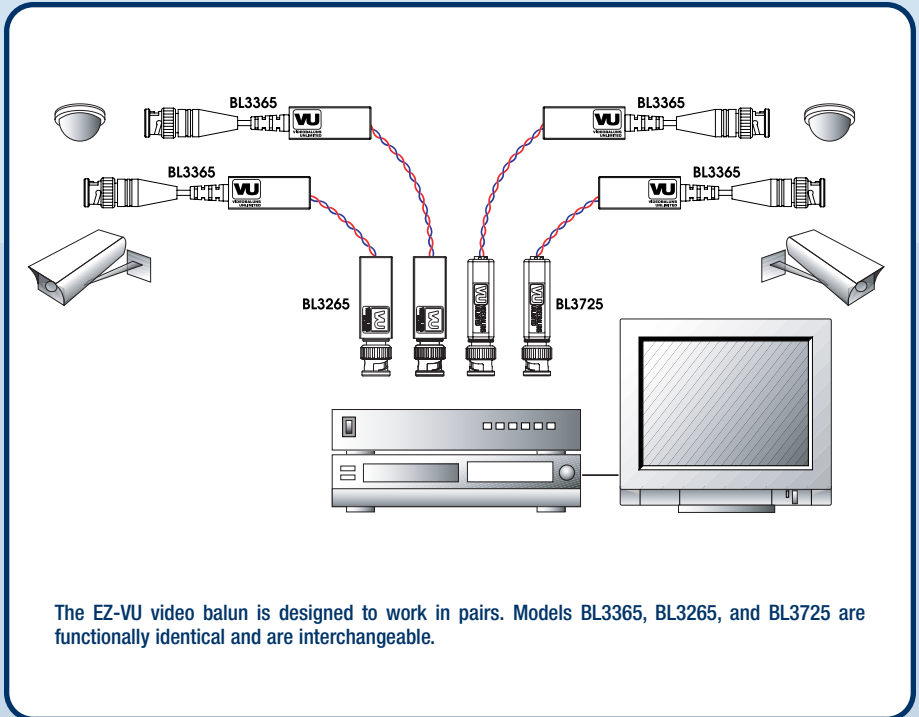

The EZ-VU video balun is designed to work in pairs. Models BL3365, BL3265, and BL3725 are functionally identical and are interchangeable.

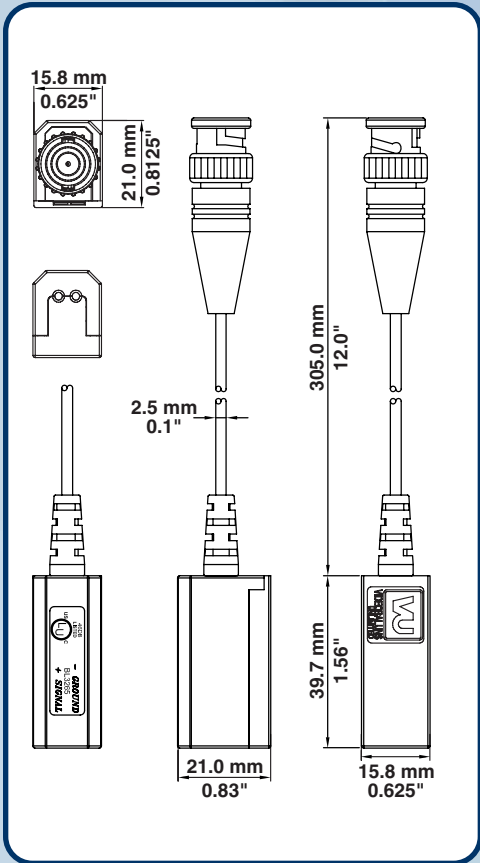

**Specifications**

|                    |                                          |                                             |
|--------------------|------------------------------------------|---------------------------------------------|
| <b>Video</b>       | Bandwidth<br>Format                      | DC to 6 MHz<br>NTSC, PAL, SECAM             |
| <b>Distance</b>    | Using Cat 5 cable                        | Up to 2000*                                 |
| <b>Wire</b>        | Unshielded Twisted Pair<br>Gauge         | Cat 2,3 5 or better<br>22 to 28 solid wire  |
| <b>Impedance</b>   | BNC Connector Side<br>UTP Connector Side | 75 ohms (unbalanced)<br>100 ohms (balanced) |
| <b>Environment</b> | Temperature<br>Humidity (non condensing) | -20 to +75 C<br>0 to 95%                    |
| <b>Mechanical</b>  | Size (LxWxH in inches)<br>Mounting       | 2 9/32 x 5/8 x 13/16<br>Floating            |
| <b>Warranty</b>    | Limited Lifetime                         |                                             |
| <b>Regulatory</b>  | UL/CUL Listed<br>Flammability            | 94V-0                                       |

\* See installation guide for more information – Distance may vary depending on cable quality

All information provided in this document is the exclusive property of Videobaluns Unlimited and any reproduction of this document or unauthorized use is strictly prohibited without the expressed permission of Videobaluns Unlimited, LLC.

**Manufactured exclusively by Videobaluns Unlimited, LLC**  
**Tel: (508) 620-1002**  
**Fax: (508) 620-1004**  
**Email: sales@videobaluns.com**